

APPLICATIONS

Cascade offers a number of fork mounted jib cranes that quickly convert a lift truck into a mobile crane to easily move non-palletised product. A variety of Jib Crane models for practically any application to increase lift truck versatility.

Models include Multi-Angled, Flat, Slip-On, or Carriage- Mounted, allowing for effective slinging of loads beneath a hook. The standard finish on this attachment is zinc.

SPECIFICATIONS


SWL 3000kg Max Load Centre 800mm H C of G: 940mm V C of G: 4mm Length: 2530mm Weight 158kg 150x65mm Fork Pockets **Pocket Centres** 225mm

DIMENSIONS

Width: 740mm
Height: 300mm
Length: 4030mm
Lug Extension 40mm



Note: All lift truck attachments affect the safe working load of a lift truck. End users should consult their lift truck supplier to ensure the lift truck is rated for use with these attachments. In the case of a slung load when lifting a jib attachment, the net lifting capacity should be 0.8 times the rating of the lift truck to allow for the swinging load. Please consult your local lift truck supplier for rating.

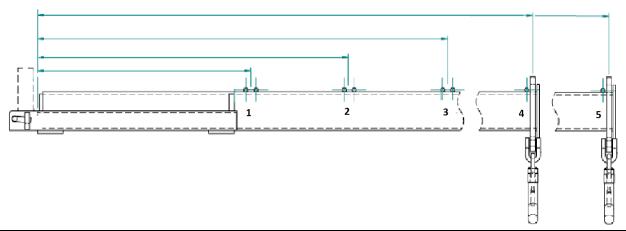

Safe Working Load (SWL) Per Position					
Position	1	2	3	4	5
SWL (kg)	3000	3000	2800	1700	1200
Extension (mm)	800	1000	1500	2000	2500